

Community Development Department

Planning · Building · Code Enforcement · Fire Prevention

Sewer Connection Procedure

THIS PROCEDURE IS FOR RESIDENTIAL ONLY

If your project is commercial, industrial or a new changed use, first go directly to the Planning Division.

STEP 1 PICK UP INFORMATION PACKET (attached):

This packet contains a sample plot plan, three (3) plot plans, and an illustration of typical plumbing installations.

STEP 2 GO TO THE ENVIRONMENTAL HEALTH DISTRICT:

The Environmental Health District is located at 600 E. Main St., Stockton.

You need to obtain a Sanitation Permit to abandon your septic tank. The Sanitation Permit must be obtained before the Building Inspection Division can issue a Plumbing Permit.

STEP 3 GO TO THE DEPARTMENT OF PUBLIC WORKS:

The Department of Public Works is located at 1810 East Hazelton Avenue, Stockton.


Take your completed plot plan (3) and Sanitation Permit to the Department of Public Works for their signature.

The Department of Public Works will verify that the appropriate fees and assessments have been paid. They also have information regarding your sewer lateral location. They will insure all fees have been paid to the City of Stockton prior to approval.

STEP 4 GO TO THE BUILDING INSPECTION DIVISION:

The Building Inspection Division is located at 1810 East Hazelton Avenue, Stockton. The Building Inspection Division will issue a Plumbing Permit.

Before going to the Building Inspection Division, you should have a Sanitation Permit from the Environmental Health District and your plot plan completed and signed by the Department of Public Works. The Building Inspection Staff can help you with your plot plan and any questions you may have regarding the installation of your plumbing.

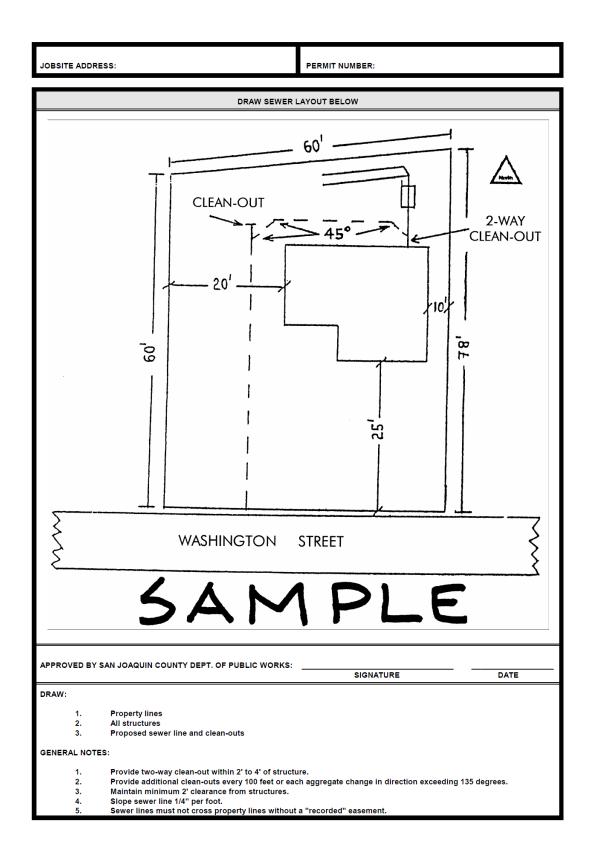

JOBSITE ADD	RESS:	PERMIT NUMBER:	
DRAW SEWER LAYOUT BELOW			
APPROVED B	Y SAN JOAQUIN COUNTY DEPT. OF PUBLIC WORKS:		
DD ANY:		SIGNATURE	DATE
DRAW:	Property lines		
2. 3.	All structures Proposed sewer line and clean-outs		
GENERAL NOTES:			
1. 2.	Provide two-way clean-out within 2' to 4' of structu Provide additional clean-outs every 100 feet or eac	re. h aggregate change in direction exceedi	ng 135 degrees.
3. 4.	Maintain minimum 2' clearance from structures. Slope sewer line 1/4" per foot.		J
Sewer lines must not cross property lines without a "recorded" easement.			