



Liquefied Petroleum Gas

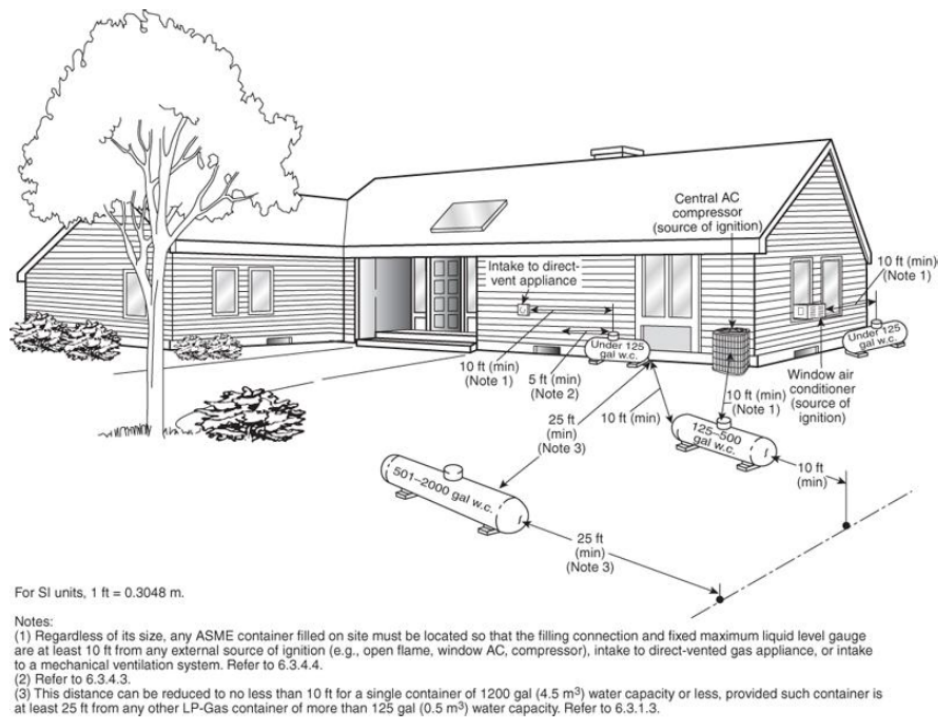


FIGURE I.1 (b) Aboveground ASME Containers. (This figure for illustration purposes only; written code shall govern)

Clearance to Combustibles. Weeds, grass, brush, trash and other combustible materials shall be kept a minimum of 10 Feet (3048 mm) from LP-gas tanks or containers.

Vehicle Impact Protection. Vehicle impact protection shall be provided by posts that comply with the following or by other approved physical barriers.

Guard posts shall comply with all of the following requirements:

1. Constructed of steel not less than 4 inches (102 mm) in diameter and concrete filled.
2. Spaced not more than 4 feet (1219 mm) between posts on center.
3. Set not less than 3 feet (914 mm) deep in a concrete footing of not less than a 15-inch (381 mm) diameter.
4. Set with the top of the posts not less than 3 feet (914 mm) above ground.
5. Located not less than 3 feet (914 mm) from the protected object.

Revised 9/5/25