

Compliance Tips

- **If you contract for bin service:** Advise the bin service provider that you have a Building Permit and that **mixed debris boxes MUST** be delivered to a county facility.
- **If you haul mixed debris yourself:** Please give building permit number to the scale house attendant at County facilities to let them know that the material is related to a construction or demolition project.
- **Keep all receipts** for recycling, disposal and/or donation activities.
- **Provide documentation** to San Joaquin County Solid Waste Division.
- **Recyclable materials** can be taken as pure loads (e.g. metal, wood) to any vendor where Solid Waste Personnel can verify that the materials are recycled.
- **All mixed debris and waste MUST** be delivered to designated County facilities.

Protect Yourself!

If your signature is on the permit application, you are responsible for C&D compliance!

- Frequently, unlicensed persons performing “handyman” services will have a property owner obtain a permit for work being performed on the owner’s behalf. If you are working with a contractor, have the contractor apply for permits. This shifts the responsibility for C&D compliance to the contractor.
- Ensure that all contractors that provide services are fully licensed with the State of California and have insurance.

For more information on contractors go to:

<http://www.cslb.ca.gov/>

Compliance Guide

San Joaquin County Construction & Demolition (C&D) Recycling and Diversion Program



The C&D Recycling Program is for Applicable Projects located within San Joaquin County ONLY. NO out of county C&D materials accepted.



Questions? Call (209) 468-3066


County-Designated Facilities: Hassle-Free C&D Ordinance Compliance

A weight receipt provided by a County-designated facility showing that all materials from an Applicable Project were delivered will constitute full compliance with the Construction and Demolition Ordinance - County permitted projects only.

LOVELACE MATERIALS RECOVERY FACILITY & TRANSFER STATION

2323 E. Lovelace Road
Manteca, CA 95336
(209) 982-5770


Open to the Public:
7:00 a.m. to 4:00 p.m. Monday – Sunday
Closed New Year’s Day, Easter Sunday,
Thanksgiving and Christmas Day.

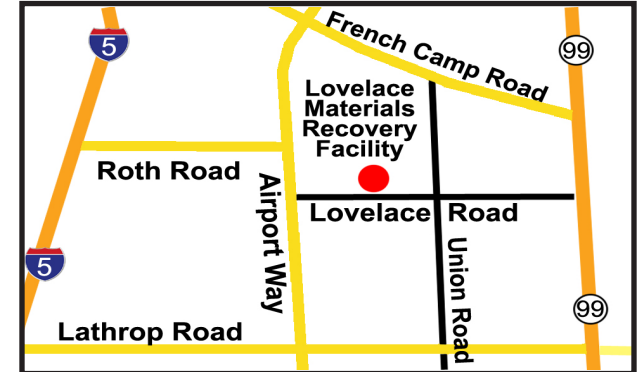

NORTH COUNTY RECYCLING CENTER & SANITARY LANDFILL

17720 E. Harney Lane
Lodi, CA 95240
(209) 887-3868


Open to the Public:
7:00 a.m. to 4:00 p.m. Monday – Sunday
Closed New Year’s Day, Easter Sunday,
Thanksgiving and Christmas Day.

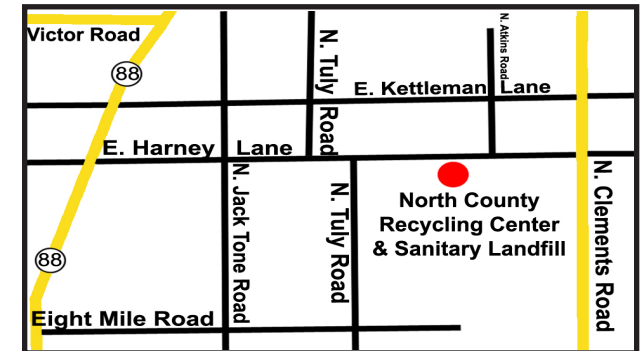

TRACY MATERIALS RECOVERY FACILITY & TRANSFER STATION

30703 S. MacArthur Drive
Tracy, CA 95377
(209) 832-2355

Open to the Public:
Monday–Saturday 8:00 a.m. to 4:00 p.m.
Closed Sunday
Closed New Year’s Day, Thanksgiving and
Christmas Day.

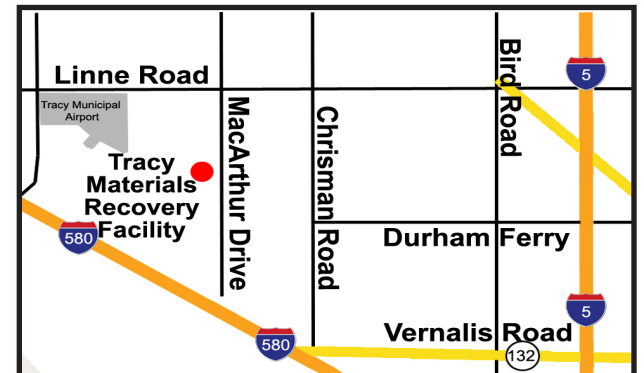

TARPING REQUIREMENT: All loads taken to County facilities must be covered. Loads that are not covered with a tarp or other cover shall be subject to additional charges.

For Forms, Mailing Address and Other Information go to:

www.SJCreycle.org


San Joaquin County Construction & Demolition (C&D) Ordinance

In 2009, the San Joaquin County Board of Supervisors adopted Ordinance #4370, also known as the *Construction, Demolition and Landscaping Debris Recycling and Diversion Ordinance*. This Ordinance requires that 50% of all Construction and Demolition Debris excluding Inert and Organic material **AND** 90% of Inert and Organic materials must be diverted from reaching the landfill through reuse and recycling. Definitions of Construction and Demolition Debris, Inerts and Organics are listed below.

All waste materials and materials that cannot be recycled or reused MUST be delivered to a facility designated by San Joaquin County's Director of Public Works.

How To Comply With San Joaquin County's C&D Ordinance

To Comply with San Joaquin County's C&D Ordinance you must recycle:




50%


OF ALL

Construction and Demolition Debris*:

- Dimensional Lumber & Wood
- Metal
- Glass
- Paper
- Sheet rock
- Cardboard
- Other non-hazardous material



AND




90%

OF ALL

Inert Materials*:


- Concrete
- Cement
- Asphalt
- Masonry
- Soil
- Brick
- Ceramics
- Rocks/Stones
- Stucco
- Other non-hazardous inerts



AND

Organic Materials:

- Yard clippings
- Tree trimmings
- Brush
- Logs and stumps
- Other non-hazardous vegetation



*list subject to change based upon recycling opportunities

C&D Reporting

Construction, demolition and renovation projects over 1,200 square feet are deemed "Applicable Projects" under San Joaquin County's C&D Ordinance. Persons applying for a permit for an Applicable Project must:

- 1) Fill out a Diversion Plan prior to undertaking an Applicable Project.
- 2) Turn in a Diversion Report within thirty days of project completion, along with receipts and/or other documentation showing the material description, weight, and contact information for the facility(ies) where material(s) were recycled.

Documents must be turned in to San Joaquin County Solid Waste Division.

Recycling & Materials Management Ways to Comply with the C&D Ordinance:

- Take all materials to a County-designated facility where materials will be recycled based on condition of the load. **A receipt provided by a County-designated facility showing that all materials from an Applicable Project were delivered will constitute full compliance with the Construction and Demolition Ordinance. Deliver all receipts to SJC Solid Waste.**

or

- Separate materials into single streams such as metals, wood, inerts or organics.
- Deliver separated materials to any verifiable recycling or re-use facility.
- Take all residual materials to a County-designated facility.
- Save all receipts and documentation showing the weight of the load, the materials delivered as well as facility location and contact information.
- **Turn in receipts and documentation showing compliance to the San Joaquin County Department of Public Works, Solid Waste Division and complete a Diversion Report.**

11/2018